


Base Configurations

CLASS	HORSEPOWER	TORQUE	GVW	GCW
8	345 – 505	1,350 – 1,850 lb-ft	35,000 – 92,000 lbs.	80,000+ lbs.

Axle Position



Axle Configurations

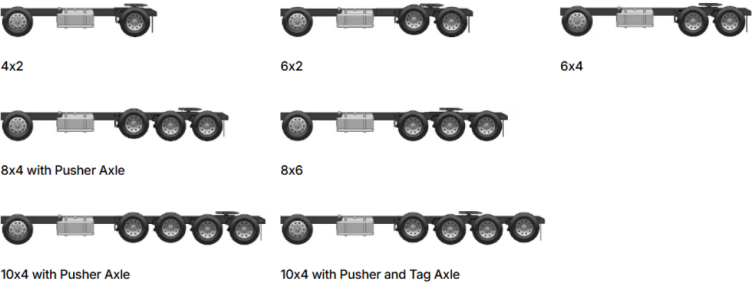

Engines

DIESEL	DIESEL	NATURAL GAS
MP7 >	MP8 >	Cummins L9N CNG >
11 Liter	13 Liter	12 Liter Natural Gas
325 – 425 HP	415 – 505 HP	320 HP
1,250 – 1,550 lb-ft	1,650 – 1,900 lb-ft	1,000 lb-ft
		(6x4 axle-back only)

Transmissions

AUTOMATED MANUAL	AUTOMATIC	MANUAL
mDRIVE HD >	Allison RDS Series	Eaton-Fuller
12, 13, or 14-speed	6-speed	10, 11, 13, or 18-speed

Axles

FRONT AXLE	DRIVE AXLE	DRIVE AXLE	DRIVE AXLE
Mack	Mack >	Meritor	Dana Spicer

Suspensions

LEAF
mRIDE >

AIR
Hendrickson Primaax EX

LEAF
Mack Camelback

AIR
Neway ADZ

AIR
Mack AL

RUBBER
Hendrickson Haulmaax EX

Standard features

EXTERIOR

Tight Turning Radius	Sloped Hood	Rubber-Sealed Windshield	Cornerstone Chassis
Galvanized Steel Cab	High Ground Clearance	D-Shaped Fuel Tank	Heavy-Duty Crossmembers
Top-Mounted Rear Axle Carriers	Air-Assisted Clutch	Cab Air Springs	Self-Cleaning Steps
Body-Ready Electrical System			

INTERIOR

Flat-Bottom Steering Wheel	Full-Color Co-Pilot Display	Power Windows	Power Locks
Illuminated Instrument Panel Controls	Digital Analog Gauges	Non-Slip Electronics Tray	Oversized Cup Holders
Sears Seating Seats	Driver's Seat Air Suspension	High-Performance HVAC System	

Optional features

POWERTRAIN
Mack Integrated Powertrain

INFORMATION AND
ENTERTAINMENT
Information and Entertainment
Panel

SEATING
Swivel Seats

AXLE CONFIGURATION
Set-Forward or Set-Back Axle
Positions

STABILITY
Roll Stability Advantage

FRAME
Custom Frame Rails

*Additional adaptations available upon
request

